




The FDX-SRP32 is a redundant power supply unit that includes two independent power connectors for FDX-S32 and FDX-S32U. In case one of power supplies fails, the other one supplies power, ensuring a proper and reliable operation.

■ Specification

Item	Description
Power	100 - 240 VAC \pm 10%, 50 Hz/60 Hz \pm 3 Hz, 2 power connectors
Weight	10.6 lbs. (4.8 kg)
Temperature	Operating : 32°F to 104°F (0°C to +40°C) Storage : -4°F to +176°F (-20°C to +80°C)
Humidity	Operating/Storage: 20% to 90% (Non Condensing)

■ Panel

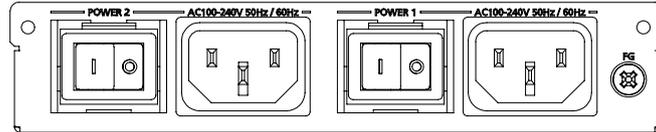

●All specifications and drawings are subject to change without notice. ●Please do not use the supplied AC adapter and power supply cable for other products. ●All other company and product names mentioned in this document are either registered trademarks or trademarks of their respective owners. In this document, the “®” or “™” marks may not be specified.