



GEN 4

Prelude 200 Series

Technical Specifications



P220

Hosts	1
-------	---

System (per host)

CPU Dies	1
CPU Cores / Die	6
CPU Clock (GHz)	3.3
CPU Model	Xeon E-2456
RAM (GB)	32

Network (per host)

1gb Mgmt. NICs	1
10gb Base-T FT	0
1gb NICs	6
10gb Base-T	0

Storage (per host)


Usable SSD (GB)	960
Usable HDD (GB)	0

Mechanical (per host)

Rack Unit	1U
Weight (lbs)	25.68
Heat (BTU)	2250
Power (W)	600
AC Auto-ranging (V)	100 ~ 240
Operating Temp (°C)	10 ~ 35

Drawing (per host)

Rail Max Depth: 868 mm
Rail Min Depth: 681 mm

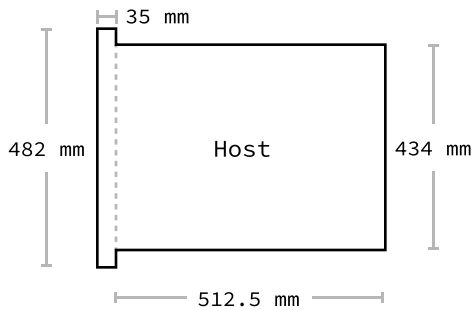

P222

Hosts	1
-------	---

System (per host)

CPU Dies	1
CPU Cores / Die	8
CPU Clock (GHz)	3.2
CPU Model	Xeon E-2488
RAM (GB)	64

Network (per host)

1gb Mgmt. NICs	1
10gb Base-T FT	0
1gb NICs	6
10gb Base-T	2

Storage (per host)

Usable SSD (GB)	960
Usable HDD (GB)	3600

Mechanical (per host)

Rack Unit	1U
Weight (lbs)	25.68
Heat (BTU)	2250
Power (W)	600
AC Auto-ranging (V)	100 ~ 240
Operating Temp (°C)	10 ~ 35

Drawing (per host)

Rail Max Depth: 868 mm
Rail Min Depth: 681 mm

