



GEN 4

Prelude 400 Series

Technical Specifications



P420

Hosts	1
-------	---

System (per host)

CPU Dies	1
CPU Cores / Die	16
CPU Clock (GHz)	2
CPU Model	Xeon Silver 4514Y
RAM (GB)	64

Network (per host)

1gb Mgmt. NICs	1
10gb Base-T FT	0
1gb NICs	6
10gb Base-T	0

Storage (per host)


Usable SSD (GB)	1920
Usable HDD (GB)	0

Mechanical (per host)

Rack Unit	2U
Weight (lbs)	54.96
Heat (BTU)	3000
Power (W)	800
AC Auto-ranging (V)	100 ~ 240
Operating Temp (°C)	10 ~ 35

Drawing (per host)

Rail Max Depth: 868 mm
Rail Min Depth: 681 mm

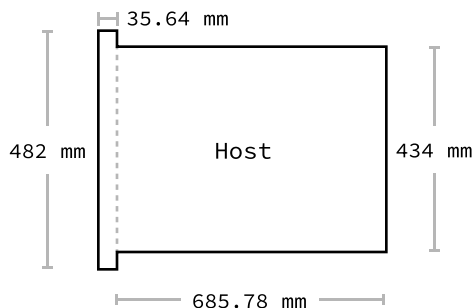

P422

Hosts	1
-------	---

System (per host)

CPU Dies	1
CPU Cores / Die	16
CPU Clock (GHz)	2
CPU Model	Xeon Gold 5416S
RAM (GB)	96

Network (per host)

1gb Mgmt. NICs	1
10gb Base-T FT	0
1gb NICs	6
10gb Base-T	2

Storage (per host)

Usable SSD (GB)	1920
Usable HDD (GB)	12000

Mechanical (per host)

Rack Unit	2U
Weight (lbs)	54.96
Heat (BTU)	3000
Power (W)	800
AC Auto-ranging (V)	100 ~ 240
Operating Temp (°C)	10 ~ 35

Drawing (per host)

Rail Max Depth: 868 mm
Rail Min Depth: 681 mm

